

TANK VALVES

HALTEC NO.	OAL	BASE THREAD	CAP THREAD	HEX SIZE
TV-399	1 5/16"	1/8" NPT	.305-32	7/16"
TV-400	1 5/16"	1/4" NPT	.305-32	9/16"
TV-401	27/32"	1/8" NPT	.305-32	7/16"
TV-402	1 5/16"	1/8" NPT	.305-32	7/16"
H-47	1 19/32"	1/4" NPT	.482-26	9/16"
TV-400S	1"	1/4" NPT	.305-32	9/16"

TANK VALVES

Utilized on pressure containers where gauging or servicing may be required. Tank valves are used with various gases, fluids and operating pressures. For specific application, please contact Haltec for technical assistance.



THERMOCOUPLE CONNECTION FOR TIRE TESTING

N-1019

Allows the testing facility to monitor internal temperature of the tire.

RADIAL TIRE BEAD SEATERS

One-piece rubber tube for mounting hard-to-seat radial, bias belted or conventional truck tires. As tire is inflated, the lubricated bead seater forms a seal between the rim and tire allowing the air pressure to force the beads into the rim flange. As proper pressure is reached, the bead seater slides out and over the rim.


FOR TRUCK TIRES:

- TC-50 for 16.5" and 17.5" Rims
- TC-60 for 19.5" Rims
- TC-70 for 22.5" and 24.5" Rims

FOR PASSENGER TIRES:

- PC-1 for 13" Rims
- PC-2 for 14" and 15" Rims
- PC-3 for 15" Rims
- PC-4 for 17" Rims
- PC-5 for 18" Rims
- PC-6 for 20" Rims
- PC-7 for 12" Rims

Note: O.S.H.A. Regulations require that service personnel use a clip-on air chuck with an inline inflator at a recommended distance that keeps the employee out of the trajectory of the tire and rim. After beads are seated, put tire and rim into approved inflation cage and continue to inflate to prescribed air pressure.

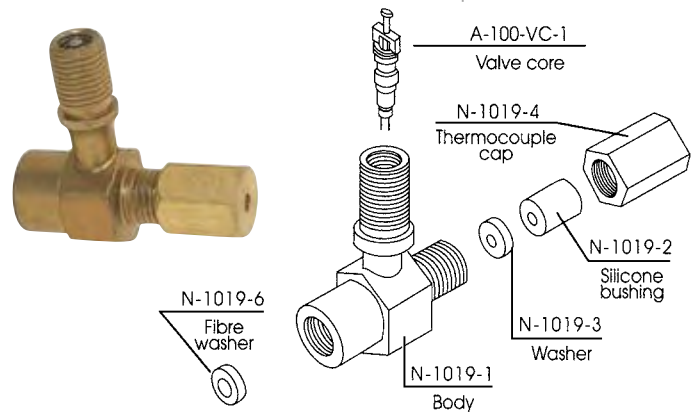

RIM GUARD HX-44

RIM GUARD HX-44

Protection cover for aluminum and chrome bolt hole areas while using an impact wrench.



WHEEL SHIELD HX-24

WHEEL SHIELD HX-24

Protection cover for aluminum and chrome wheels. Snaps into place. Shows proper torque sequence numbers for wheel nuts.

SPECIAL APPLICATIONS