


LOCK RING TOOLS

These tools are designed to remove lock rings on most trucks on the road today. A must have for anyone mounting or demounting multi-piece rims.

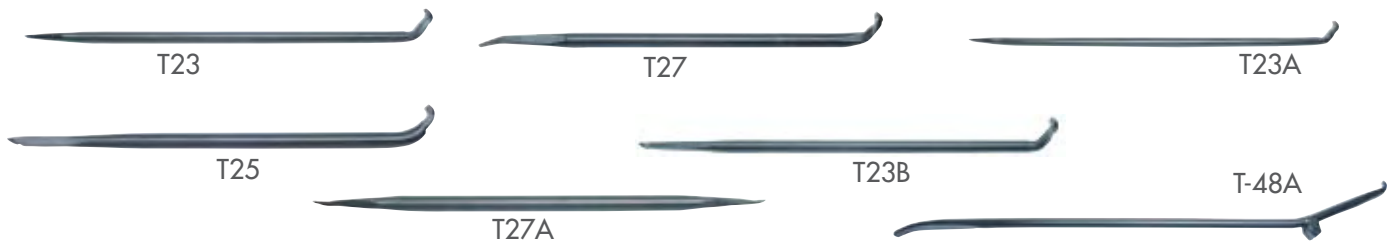

LOCK RING TOOLS

PART NO.	EDP NO.	DESCRIPTION	LENGTH	STOCK	WEIGHT
T23	32123	Truck Lock Ring Remover Designed especially for Firestone RH and TI rims	24" (61cm)	11/16" (17.5cm)	2 1/4 lbs. (1.0kg)
T23A	33223	Truck Lock Ring Remover Designed Especially for Firestone RH And RI rims	30" (76.2cm)	11/16" (17.5cm)	2 1/2 lbs. (1.1kg)
T23B	33224	Combination Rim/Ring Tool Flat, tapered end ideal for all round ring & rim work	23 1/2" (59.7cm)	11/16" (17.5cm)	2 1/2 lbs. (1.1kg)
T25	32125	5" Rim Lock Tool For Servicing 5" wide base rims	18" (45.7cm)	5/8" (16cm)	1 3/4 lbs. (.8kg)
T27	32127	Special Lock Ring Tool Long, tapered curved end for R-1 continuous side rings; short curved end for Goodyear rims	18" (45.7cm)	5/8" (16cm)	1 3/4 lbs. (.8kg)
T27A	32128	Lock Ring Tool Remove continuous side rings on two-piece truck rims	18" (45.7cm)	5/8" (16cm)	1 3/4 lbs. (.8kg)
T48A	34648	Heavy-duty lock ring tool used for multi-piece wheels, especially hub types	37" (94cm)	3/4" (19mm)	4 1/2 lbs. (2.0 kg)

TIRE INFLATION CAGES

Mandatory for any shop working with tubeless and multi-piece rims. Made from heavy-gauge steel tubing welded to a steel base. Guards against blown lock rings and rims. Follow safety instructions on cage and OSHA regulation 29-CFR Part 1910.177. Meets OSHA regulation requirements for Medium, Heavy-Duty Truck, OTR, Tractor and Super Singles. Ken-Tool offers a size and design for all your needs. For additional safety instructions, call Haltec customer service.



SAFETY!

WARNING: SAFETY CAGES - TIRE CHANGING CAN BE DANGEROUS AND SHOULD BE DONE BY TRAINED PERSONNEL USING PROPER TOOLS AND EQUIPMENT AS DIRECTED BY FEDERAL OSHA STANDARD NO. 29CFR PART 1910.177. TIRES MAY EXPLODE DURING INFLATION CAUSING INJURY TO OPERATOR OR BYSTANDER. WEAR SAFETY GOGGLES. KEEP ALL PARTS OF BODY OUTSIDE CAGE. USE EXTENSION HOSE, CLIP-ON CHUCK AND REMOTE VALVE. SEE SUPERVISOR FOR SAFETY PROCEDURES.

31810 ALUMINUM WHEEL PROTECTOR

Save expensive rims from damage during manual changing. Prevents tire tools from marring or scratching aluminum or steel rims when using Ken-Tool's manual tire changing tools. Durable leather protector fits on rim and protects inside of the rim well.



TIRE INFLATION CAGES

PART NO.	EDP NO.	DESCRIPTION	A HEIGHT	B WIDTH	BASE	WEIGHT
T102	36002	4-Bar Cage*	43 1/2" (110.5cm)	20 1/2" (52.1cm)	31 1/2 x 26" (80 x 66.0cm)	152 lbs. (69.0kg)
T105	36005	5-Bar Cage*	43 1/2" (110.5cm)	20 1/2" (52.1cm)	41 x 26" (104.1 x 66.0cm)	192 lbs. (87.2kg)
T101	36001	Portable 2-Bar Cage	41" (104cm)	16" (41cm)	7" closed x 21 1/2"	60 lbs. (27.2kg)
T104	36004	3-Bar Cage - OTR	65" (165cm)	24" (61cm)	30" x 27" (76cm x 69cm)	158 lbs. (72.6kg)

KENTOOL