




INDIVIDUAL HEAVY-DUTY TRUCK TORQUE EXTENSIONS

MODEL	DESCRIPTION	DRIVE SIZE SOCKET/OPENING	TORQUE LIMIT	WEIGHT
30230	Yellow (O)	3/4"	175 ft/lbs	.75 lbs. (.3 kg)
30231	Yellow (N)	3/4"	250 ft/lbs	.75 lbs. (.3 kg)
30232	Yellow (U)	3/4"	350 ft/lbs	.75 lbs. (.3 kg)
30233	Yellow (M)	3/4"	475 ft/lbs	.75 lbs. (.3 kg)
30236	Yellow (T)	1"	175 ft/lbs	1 lbs. (.5 kg)
30237	Yellow (R)	1"	250 ft/lbs	1 lbs. (.5 kg)
30238	Yellow (S)	1"	350 ft/lbs	1 lbs. (.5 kg)
30239	Yellow (P)	1"	475 ft/lbs	1 lbs. (.5 kg)
30240	Yellow (W)	1"	650 ft/lbs	1 lbs. (.5 kg)

WARNING: Torque sockets & truck torque extensions cannot be used to take off wheel nuts. Calibrate your impact gun & follow all manufactures' recommended procedures when using Torque Master products.

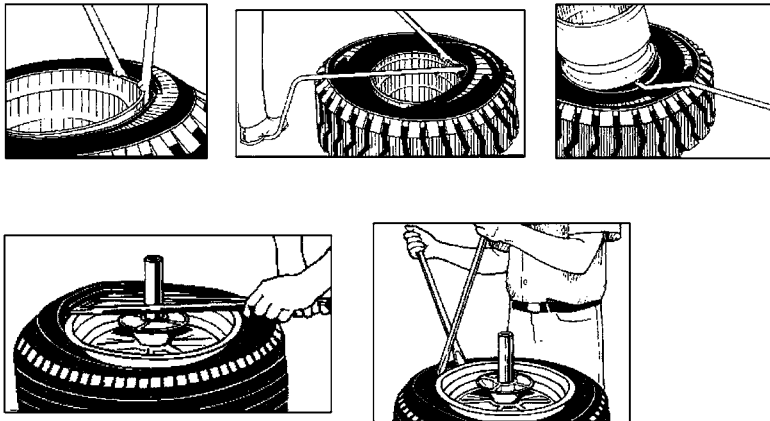

TIRE MOUNT/DEMOUNT SPOONS

These irons are designed for fast and efficient tire changing. The 30" spoons provide enough strength and leverage to work on large truck, bus, off-road vehicle, tractor and aircraft tires.

TIRE MOUNT/DEMOUNT SPOONS

PART NO.	EDP NO.	LENGTH	STOCK	WEIGHT
T20A	33220	30" (76.2cm)	11/16" (17.5mm)	3 lbs. (1.4kg)
T39	33239	30" (76.2cm)	7/8" (22mm)	4 1/2 lbs. (2.0kg)
T19A	33219	30"	11/16"	3 lbs.



KENTOOL