

TUBELESS TIRE REPAIR KIT

- RK-800 - Off-Road Tubeless Tire Kit Consists of:
 RK-810 - Tire insertion tool (1)
 RK-820 - Tire material (1Box-50, 12" strips)
 RK-830 - Tire repair compound (8 oz.)
 RK-840 - Tire concentrated leak finder material (1)
 RK-850 - Tire concentrated leak finder applicator (1)
Items can be ordered separately



WH-JF-994

AIR WATER VALVE

Used in conjunction with WH-330-J-694 Large Bore valve.

HALTEC NO.	TR NO.	BEND ANGLE	"L" HORIZ. LENGTH		CAP
			INCHES	MM	
WH-JF-994	JF-994	28°	3 1/2	88.9	A-151

LARGE RADIUS, HIGH BEND AIR VALVE USED WITH 977S

All valves fit 13/16" valve hole.

Uses A-145 valve core and A-149 cap.

HALTEC NO.	BEND ANGLE	"L" LENGTH		"H" HEIGHT	
		INCHES	MM	INCHES	MM
114S-5 1/2	90°	5 1/2	139.7	2	50.8
114S-11	90°	11	279.4	2	50.8

LARGE RADIUS, HIGH BEND AIR LIQUID VALVE


Uses Super Large Bore T-81 spud (TR-SP-8).

Uses A-151 cap.

HALTEC NO.	BEND ANGLE	"L" LENGTH		"H" HEIGHT	
		INCHES	MM	INCHES	MM
977S-5 1/2	90°	5 1/2	139.7	2	50.8
977S-11	90°	11	279.4	2	50.8

SPECIAL HYDROFLATING VALVES

DESIGNED FOR FASTER FILLING OF TIRES WITH LIQUID. DOES NOT CONTAIN VALVE CORE. STRAIGHT-THROUGH 5/16" OPENING IS SEALED WITH SPECIAL O-RING CAP NO. A-151. USED ON LOADER TIRE IN CONJUNCTION WITH SIMILAR LARGE BORE AIR VALVE.

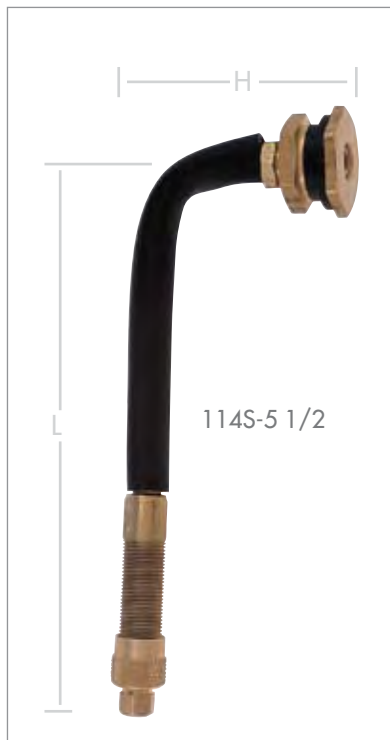

114S-5 1/2



977S-5 1/2

LARGE BORE VALVES