

PT VALVE SYSTEM

HALTEC NO.	DESCRIPTION	CAP
PT Gauge	Gauge with nut for use on PT valves, 0-160 psi	-
PTC	Block-off collar for PT valves when gauge is not attached	-
PT-300-J-650	WH-300-J-650 with PT grooves and O-rings	A-150
PT-45-6	WH-45-6 with PT grooves and O-rings	A-150
PT-330-J-690	WH-330-J-690 with PT grooves and O-rings	A-150
PT-H-42	H-42 with PT grooves and O-rings	A-150
PT-753S-6	753S-6 with PT grooves and O-rings	A-150
PT-R-520	R-520 with PT grooves and O-rings for Super Large Bore	A-150
PT-330-3 1/2	Turret-style valve with 3 1/2" effective length	A-150

- Other Valves and Sizes Available
- To order other valves add the prefix "PT" to the Haltec valve number
- Assemble the valve to the tire and wheel assembly before installing the PT gauge to the PT valve.




This gauge mounts on specially designed PT-style valves which allow visual tire pressure checks yet also allows for inflation, deflation and manual pressure checks without removing the gauge.

The PT gauge has an all-anodized aluminum body and is totally sealed to prevent moisture from fogging the glow-in-the-dark dial.

The PT Gauge is liquid filled to prevent damage from vibration.



PT GAUGE WITH VALVE

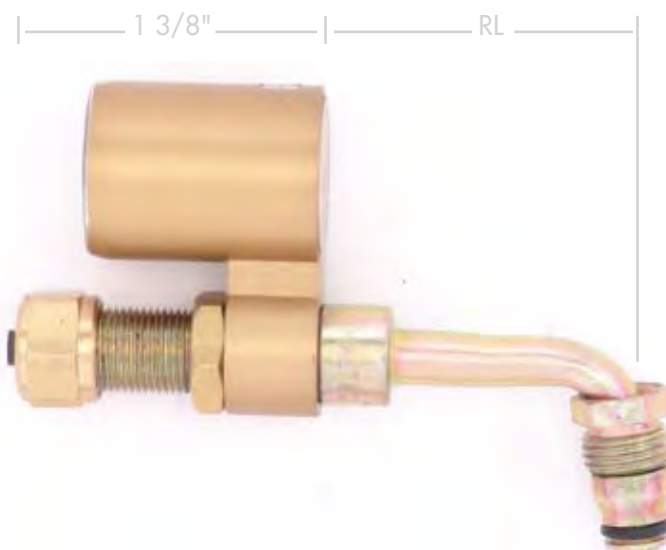

PT GAUGE on valve (side view)

When ordering valves for steering rim assemblies, check the rear length measurement (RL) so the device will clear the valve lug. This is important on some front truck rims and rear forklift or container mover tires.